

Fittings for sliding doors

Sliding door handle for bathroom and WC

- Aluminium
- Stainless steel
- Bronze

42 4255 ■

For single and double-leaf sliding doors

42 4255 09007

Set with sliding-door mortice lock series 71/WC (with compass bolt)

For use on double-leaf sliding doors, FSB 42 4255 09006 is also required (see page 556).

Suitable for standard door thicknesses of 38–42 mm; available up to door thickness 62 mm
Stainless steel forend and strike plate


Scope of delivery:

- Set
- Sliding-door mortice lock Series 71/WC
- Strike plate




Outside

Inside

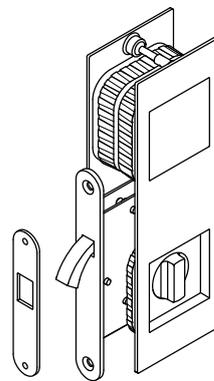

Pictured: installation example for single-leaf sliding door

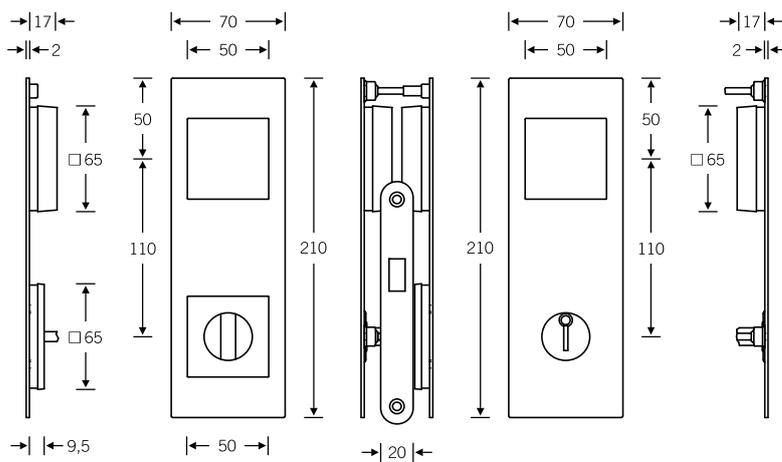

Note: CNC machining is required for routing recesses; CNC routing details can be found at www.fsb.de/cnc