

KC 50

closing magnet for a contactless and silent closing process of glass and timber doors



Product features

- continuous adjustable retention force up to 5,0 kg
- for use in timber, steel and aluminium frames

Technical details

Attributes	Value
Overall length	195,0 mm
Overall width	13,0 mm
Cutter diameter	12,0 mm

Suitable for

Universal milling frame

Template 5 251148 5

Template 5 251149 5

step 1

step 2

Combinations

TEG 310 2D 60

TEG 310 2D 80


KC 170

KC 50/G

KC 50/H



front view

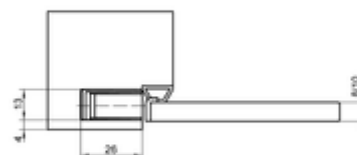

cross section glass door


TECTUS - KC 50

KC 50 FZ


Item

Finish(es)	130-Stainless Steel Effect
OF-NR.	130
VPE	pack of 1
DIN	DIN right and left hand
Item No.	5 170855 0 13001
EAN	4015471130947

Finish(es)	130-Stainless Steel Effect
OF-NR.	130
VPE	pack of 10
DIN	DIN right and left hand
Item No.	5 170855 0 13006
EAN	4015471131111

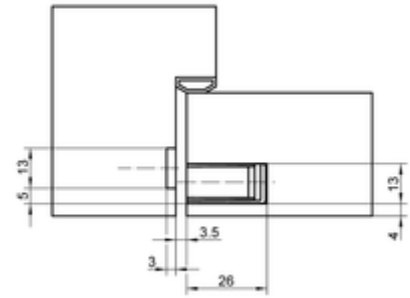

cross section 1 timber door

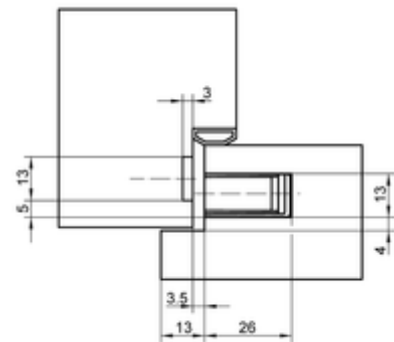

cross section 2 timber door