










KUBICA K5080

MATERIAL Zamak	LOAD CAPACITY 80 kg (n.2 hinges) 	APPLICATION Flush to the wall door 	K DISTANCE  K-max 4 mm
HINGE CENTERED ON THE DOOR LEAF  Max Thk 36 mm	OPENING ANGLE 180° 	3D ADJUSTMENTS 	
 Tested with door closer*	INTERCHANGEABLE WITH: K8080 / K8120 	COVER MATERIAL Aluminum  Cover with screws	NUMBER OF ROTATION AXES 5 
Suitable for high opening and closing environment	 Product Quality Multi-axis, concealed hinges EAD 020001-01-0405 Reg.-N°: 9000283	Rif. report reference N° R27182-20130522 	
EN 1634-1  30 min.	 Krona Koblenz SpA Via Romero, 1 47853 Coriano ETA-17/0575 DdP/DoP-Nr. 003TA/CPR/2018-02-01 HINGES DO NOT CONTAIN HARMFUL SUBSTANCES KUBICA K5080 https://www.kronakoblenz.com/en/koblenz/hinges_24689/kubica-k5080_24662	EN 1670 Spray salt tested 240 hours	
MADE IN ITALY 			

*Tested with door closer models most frequently used on the market.



Classic Series

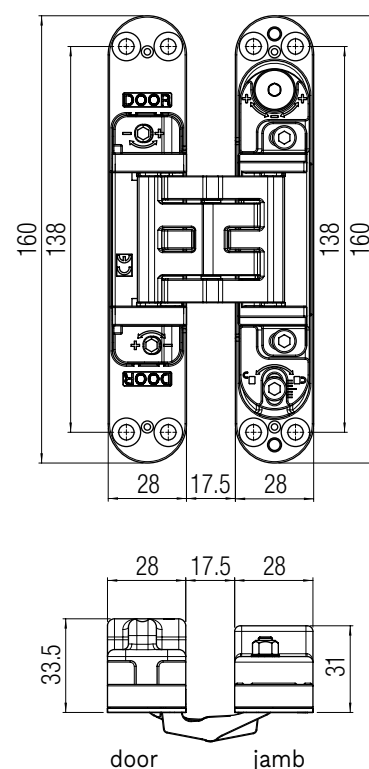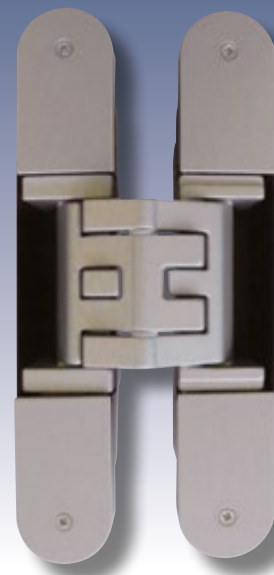

Finishing

Colour	Item number.
	K 5080 CS DXSX
	K 5080 NS DXSX
	K 5080 OR DXSX
	K 5080 BR DXSX
	K 5080 NR


For other colours please ask Krona Koblenz for feasibility

Load capacity table (see the reading guide at page 12)




Hinge spacing (mm)**	K5080 - 80 Kg - N.2 hinges												
	2000		80	80	80	80	80	80	80	80	80	77	74
	1950		80	80	80	80	80	80	80	80	78	75	72
	1900		80	80	80	80	80	80	80	79	76	73	70
	1850		80	80	80	80	80	80	80	77	74	71	68
	1800		80	80	80	80	80	80	79	75	72	69	67
	1750		80	80	80	80	80	80	77	73	70	67	65
	1700		80	80	80	80	80	78	74	71	68	65	63
	1650		80	80	80	80	79	76	72	69	66	63	61
	1600		80	80	80	80	77	73	70	67	64	62	59
	1550		80	80	80	78	75	71	68	65	62	60	57
	1500		80	80	80	76	72	69	66	63	60	58	56
	1450		80	80	78	73	70	66	63	61	58	56	54
	1540	80											
		926	700	800	900	950	1000	1050	1100	1150	1200	1250	1300
Door leaf width (mm)**													

- Tested on doors: height 2100 mm - width 900 mm - opening angle 0°-90°.

**With door dimensions and max opening angle different from the tested configuration and/or with the application of other devices such as, for example, door closers/bumpers/emergency handle/dropdown seal/etc. refer to the "Installation Examples". Please note that testing for these configurations is under customer's responsibility. We specify that the combinations are the result of interpolation and not of real tests, which remain under the customer's responsibility.

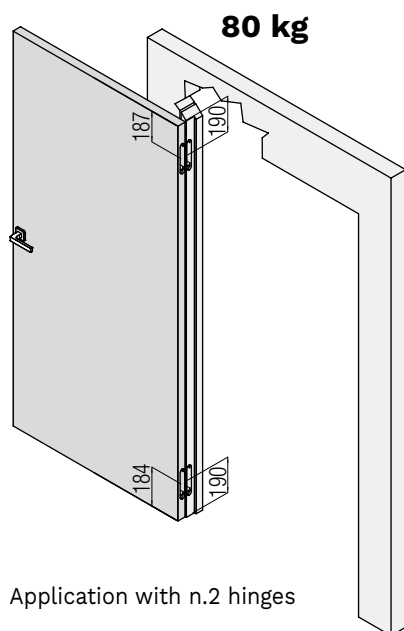Standard application

Application with n.2 hinges

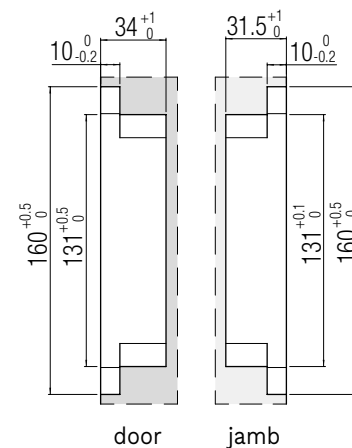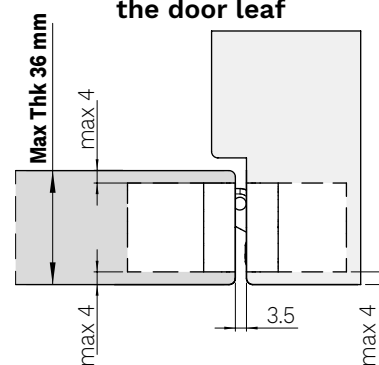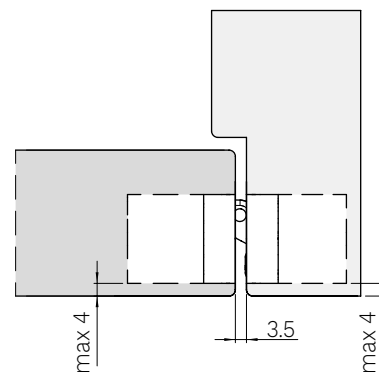Milling door/jamb**Installation of Hinge centered on the door leaf****Installation of Hinge NOT centered on the door leaf**

☒ **Fixing screws included**

The hinge fixing is ensured by using the **fixing screws** indicated in the hinge assembly instructions.