











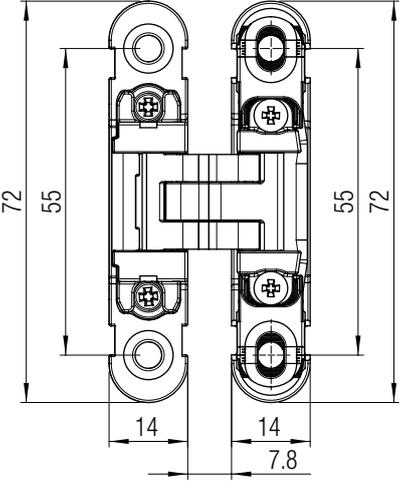
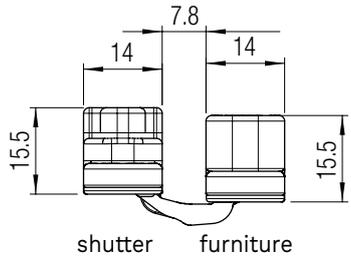


# Kubikina New K6100

<p><b>MATERIAL</b></p> <p>Casing: Zamak Adjustment body: Acetal plastic Connecting rods: Zamak</p>	<p><b>LOAD CAPACITY</b></p> <p>10,5 kg (n.2 hinges) 14 kg (n.3 hinges) 19 kg (n.4 hinges)</p> 	<p><b>APPLICATION</b></p> <p>Furniture</p> 	<p><b>K DISTANCE</b></p>  <p>K-max 3 mm</p>
<p><b>OPENING ANGLE</b></p> <p>180°</p> 	<p><b>HINGE CENTERED ON THE DOOR LEAF</b></p>  <p>Max Thk 20 mm</p>		<p><b>3D ADJUSTMENTS</b></p>  <p>Z +1.5 / -1.5 X +1.5 / -1.5 Y x1 / -1</p>
	<p><b>INSTALLATION INSIDE THE CABINET</b></p>		<p><b>INSTALLATION OUTSIDE THE CABINET</b></p>
 <p><b>HEIGHT OF THE SHUTTER</b></p> <p>1 mt (n.2 hinges) 1,5 mt (n.3 hinges) 2 mt (n.4 hinges)</p>	<p><b>WIDTH OF THE SHUTTER</b></p>  <p>max 600 mm</p>	<p><b>FINISHING</b></p> <p>Full HD</p> 	
<p><b>COVER MATERIAL</b></p> <p>Steel</p> 	<p><b>NUMBER OF ROTATION AXES</b></p> <p>5</p> 	 <p>DIN EN 15570:2008-08 test level 2</p> <p>Test report No. 00793</p>	
<p>EN 1670</p> <p>Spray salt tested</p> <p><b>240 hours</b></p>	<p><b>MADE IN ITALY</b></p> 		

Classic Series

72 55 55 72

14 14 7.8

15.5 15.5

shutter furniture

Finishing

Colour	Item number.
 Satin chrome	<b>K 6100 CS HD</b>
 White	<b>K 6100 BI HD</b>
 Black	<b>K 6100 NO HD</b>

For other colours please ask Krona Koblenz for feasibility

Index

Vademecum

Legenda

Performance Series


Evolution Series

Classic Series

Finishes

Accessories

Warnings

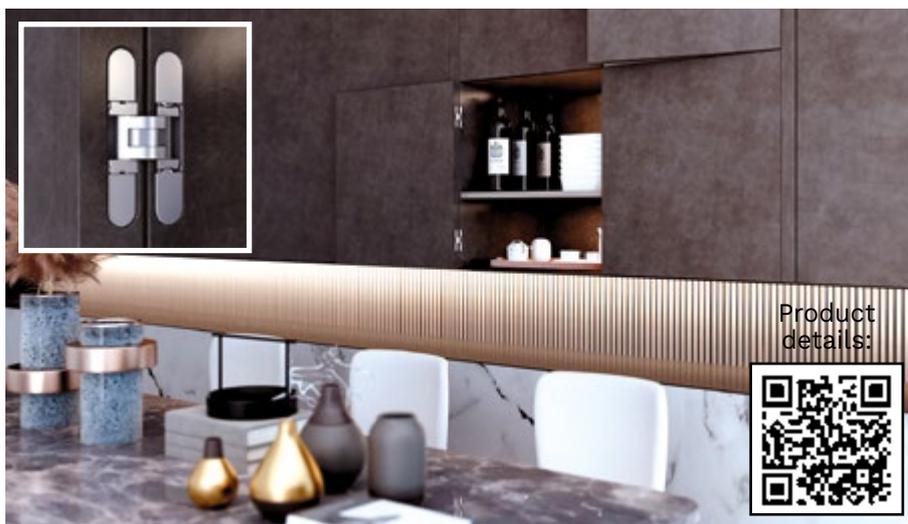

**Load capacity table** (see the reading guide at page 12)

K6100 - 10,5 Kg - N.2 hinges								
Hinge spacing (mm)	850	10,5	10,5	10,5	10,5	10,5	9,0	
	750	10,5	10,5	10,5	10,5	9,2	7,9	
	650	10,5	10,5	10,5	9,5	7,9	6,8	
	550	10,5	10,5	10,5	8,0	6,7	5,7	
	450	10,5	10,5	8,1	6,5	5,4		
	350	10,5	8,2	6,1	4,9			
820	<b>10,5</b>							
	600	200	300	400	500	600	700	
Door leaf width (mm)								

K6100 - 14 Kg - N.3 hinges								
Hinge spacing (mm)	1350	14,0	14,0	14,0	14,0	14,0	12,9	
	1250	14,0	14,0	14,0	14,0	14,0	12,0	
	1150	14,0	14,0	14,0	14,0	13,0	11,1	
	1050	14,0	14,0	14,0	14,0	12,0	10,3	
	950	14,0	14,0	14,0	13,2	11,0	9,4	
	850	14,0	14,0	14,0	12,0	10,5	9,0	
1320	<b>14</b>							
	600	200	300	400	500	600	700	
Door leaf width (mm)								


K6100 - 19 Kg - N.4 hinges								
Hinge spacing (mm)	1850	19,0	19,0	19,0	19,0	19,0	16,3	
	1750	19,0	19,0	19,0	19,0	18,1	15,5	
	1650	19,0	19,0	19,0	19,0	17,1	14,7	
	1550	19,0	19,0	19,0	19,0	16,2	13,8	
	1450	19,0	19,0	19,0	18,2	15,2	13,0	
	1350	19,0	19,0	19,0	17,1	14,0	12,9	
1820	<b>19</b>							
	600	200	300	400	500	600	700	
Door leaf width (mm)								

Tested according to EN 15570:2008 - Level 2 on furniture shutters:

- Height 1000 mm - width 600 mm (2 hinges, 10,5kg).
- Height 1500 mm - width 600 mm (3 hinges, 14kg).
- Height 2000 mm - width 600 mm (4 hinges, 19kg).


With a door leaf of different dimensions from the tested configurations and/or with the application of other devices such as, for example, dampers/cables/door closers/etc., please note that the tests are to be carried out and taken under the customer's responsibility, and Krona Koblenz disclaims any liability in this regard.

**Milling pattern for inside and outside the cabinet application**

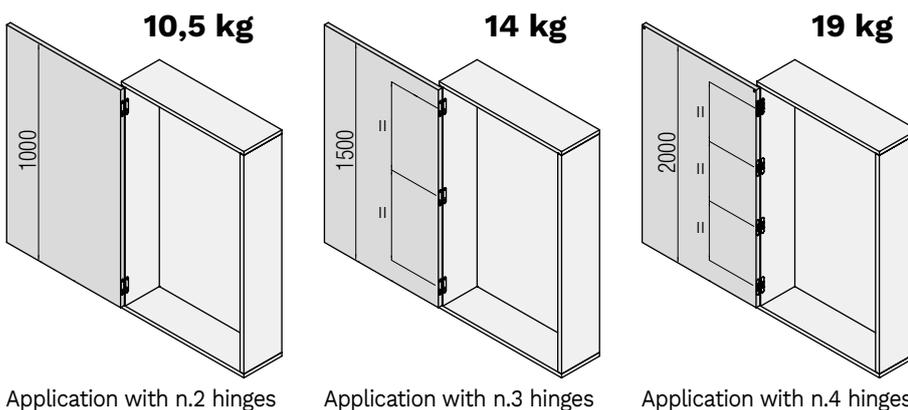


 The hinge fixing is ensured by using the fixing screws indicated in our hinge assembly instructions.


**Milling shutter/furniture**

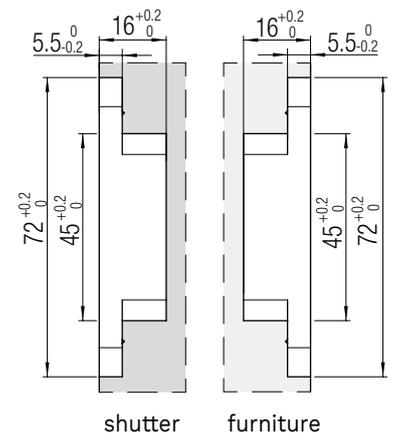

**Centered hinge for inside the cabinet installation**

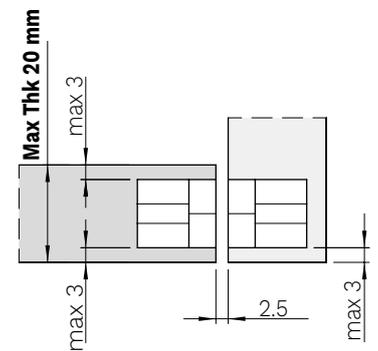

**Not Centered hinge for inside the cabinet installation**

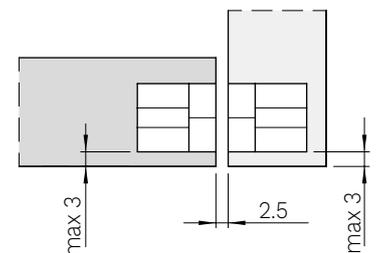

**Outside the cabinet**

