








KUBICA K6200

MATERIAL Zamak	LOAD CAPACITY 45 kg (n.2 hinges) 60 kg (n.3 hinges) 	APPLICATION Flush to the wall door 	K DISTANCE  K-max 4 mm
HINGE CENTERED ON THE DOOR LEAF  Max Thk 31 mm	OPENING ANGLE 180° 	3D ADJUSTMENTS  Z: +2.5 / -2.5 X: +3 / -2 Y: +1 / -1	NUMBER OF ROTATION AXES 5 
 Tested with door closer*	FINISHING Full HD 	COVER MATERIAL Aluminum  Kit of cover with screws (optional)	EN 1634-1  30 min.
 Product Quality Multi-axis, concealed hinges EAD 020001-01-0405 Reg.-N°: 9000283	EN 1670 Spray salt tested 240 hours	MADE IN ITALY 	

*Tested with door closer models most frequently used on the market.



Classic Series

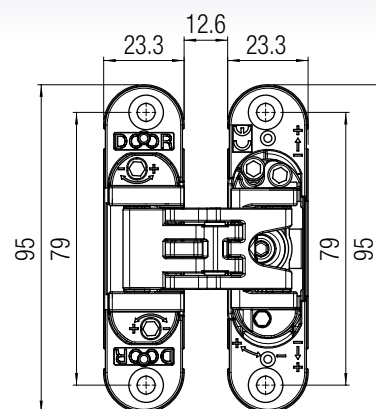

Finishing

Colour	Item number.
 Polished chrome	K 6200 CL HD
 Satin chrome	K 6200 CS HD
 Satin nickel	K 6200 NS HD
 Polished gold	K 6200 OR HD
 Bronze	K 6200 BR HD
 White	K 6200 BI HD
 Black	K 6200 NR HD

For other colours please ask Krona Koblenz for feasibility



Load capacity table (see the reading guide at page 12)

Hinge spacing (mm)**	K6200 - 45 Kg - N.2 hinges												
	2000		*45	*45	*45	*45	*45	*45	*43	*41	39	37	36
	1950		*45	*45	*45	*45	*45	*43	*42	40	38	37	35
	1900		*45	*45	*45	*45	*44	*42	40	39	37	36	34
	1850		*45	*45	*45	*45	*43	*41	39	38	36	35	33
	1800		*45	*45	*45	*44	*42	40	38	37	35	34	32
	1750		*45	*45	*45	*43	*41	39	37	36	34	33	32
	1700		*45	*45	*44	*42	40	38	36	35	33	32	31
	1650		*45	*45	*43	*41	39	37	35	34	32	31	30
	1600		*45	*45	*42	39	37	36	34	33	31	30	29
	1550		*45	*45	40	38	36	35	33	32	30	29	28
	1500		*45	*44	39	37	35	33	32	31	29	28	27
	1450		*45	*42	38	36	34	32	31	30	28	27	26
	1730	45											
	900	700	800	900	950	1000	1050	1100	1150	1200	1250	1300	
Door leaf width (mm)**													


*Consider the 40 kg capacity as CE compliance

Hinge spacing (mm)**		K6200 - 60 Kg - N.3 hinges												
		2000		60	60	60	60	60	59	57	54	52	50	48
		1950		60	60	60	60	60	58	55	53	51	49	47
		1900		60	60	60	60	59	56	54	52	49	47	46
		1850		60	60	60	60	58	55	52	50	48	46	44
		1800		60	60	60	59	56	54	51	49	47	45	43
		1750		60	60	60	57	55	52	50	47	46	44	42
		1700		60	60	59	56	53	51	48	46	44	42	41
		1650		60	60	57	54	52	49	47	45	43	41	40
		1600		60	60	55	53	50	48	45	43	42	40	38
		1550		60	60	54	51	48	46	44	42	40	39	37
		1500		60	59	52	49	47	45	43	41	39	37	36
		1450		60	57	50	48	45	43	41	39	38	36	35
		1730	60											
			900	700	800	900	950	1000	1050	1100	1150	1200	1250	1300
		Door leaf width (mm)**												


- Tested on doors: height 2100 mm - width 900 mm - opening angle 0°-90°.

**With door dimensions and max opening angle different from the tested configuration and/or with the application of other devices such as, for example, door closers/bumpers/emergency handle/dropdown seal/etc. refer to the "Installation Examples". Please note that testing for these configurations is under customer's responsibility. We specify that the combinations are the result of interpolation and not of real tests, which remain under the customer's responsibility.

Standard application

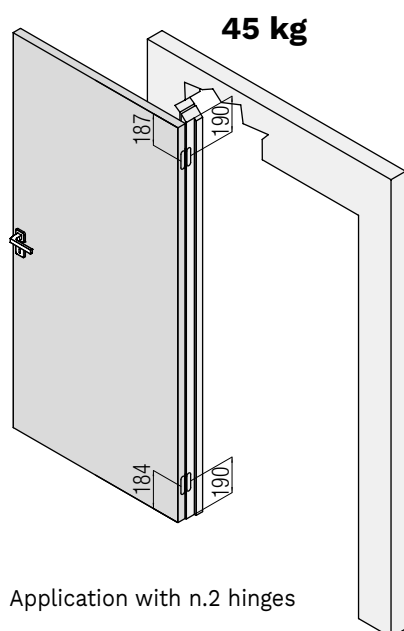


Application with n.2 hinges

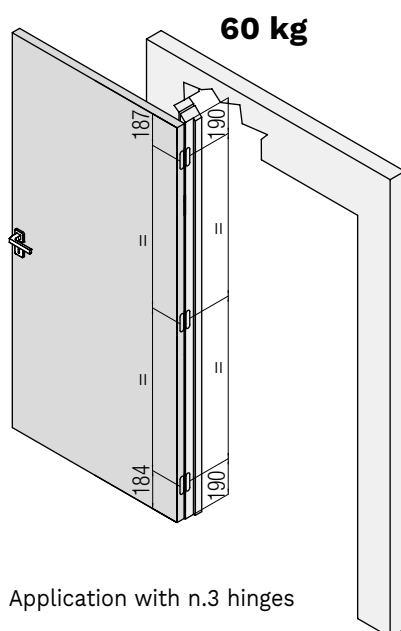

Application with n.3 hinges


Milling door/jamb

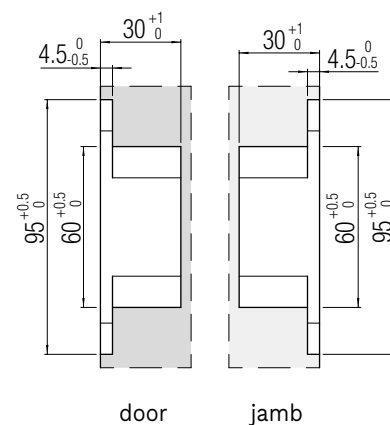


door

jamb

Installation of Hinge centered on the door leaf

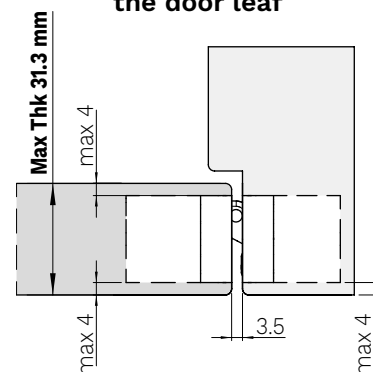

Installation of Hinge NOT centered on the door leaf

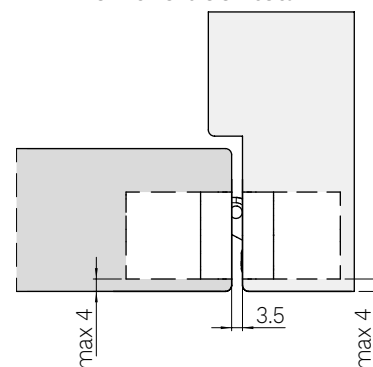

The hinge fixing is ensured by using the fixing screws indicated in our hinge assembly instructions.

