









KUBICA K2460 HYBRID

PATENTED

Evolution Series

MATERIAL Casing: Steel Adjustment body: Zamak Connecting rods: Zamak	LOAD CAPACITY 60 kg (n.2 hinges) 	APPLICATION Flush to the wall door 	APPLICATION Door leaf with internal rebate 																																					
APPLICATION Furniture 	K DISTANCE  K-max 4 mm	OPENING ANGLE 180° 	3D ADJUSTMENTS  Z: +3 / -3 X: +3 / -3 Y: +15 / -15																																					
FINISHING Full HD 	COVER MATERIAL Steel  Kit of cover with screws (optional)	NUMBER OF ROTATION AXES 5 																																						
 Product Quality N° 20-000798-PR01 - 11/05/2020 Multi-axis, concealed hinges EAD 020001-01-0405 Reg.-N°: 9000283																																								
<table><tr><td>CE</td><td>Krona Koblenz SpA Via Romero, 1 47853 Coriano</td><td colspan="5">21</td></tr><tr><td>0757</td><td>ETA-17/0575 DdP/DoP-Nr. 00771TA/CPR/2021-06-28</td><td>2</td><td>7</td><td>3</td><td>1</td><td>1</td><td>4*</td><td>0</td><td>10</td></tr><tr><td colspan="2">0757-CPR-229EAD-9000283-2-3</td><td colspan="8">HINGES DO NOT CONTAIN HARMFUL SUBSTANCES</td></tr><tr><td colspan="10">KUBICA HYBRID K2460 https://www.kronakoblenz.com/en/koblenz/concealed-hinges_24689/kubica-hybrid-k2460_28860</td></tr></table>				CE	Krona Koblenz SpA Via Romero, 1 47853 Coriano	21					0757	ETA-17/0575 DdP/DoP-Nr. 00771TA/CPR/2021-06-28	2	7	3	1	1	4*	0	10	0757-CPR-229EAD-9000283-2-3		HINGES DO NOT CONTAIN HARMFUL SUBSTANCES								KUBICA HYBRID K2460 https://www.kronakoblenz.com/en/koblenz/concealed-hinges_24689/kubica-hybrid-k2460_28860									
CE	Krona Koblenz SpA Via Romero, 1 47853 Coriano	21																																						
0757	ETA-17/0575 DdP/DoP-Nr. 00771TA/CPR/2021-06-28	2	7	3	1	1	4*	0	10																															
0757-CPR-229EAD-9000283-2-3		HINGES DO NOT CONTAIN HARMFUL SUBSTANCES																																						
KUBICA HYBRID K2460 https://www.kronakoblenz.com/en/koblenz/concealed-hinges_24689/kubica-hybrid-k2460_28860																																								
Rif. report reference N° R27182-20130522 	EN 1634-1  30 min.	EN 1670 Spray salt tested 240 hours	MADE IN ITALY 																																					

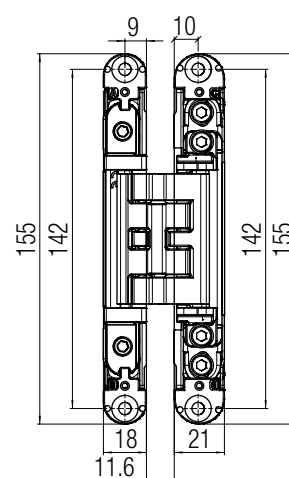

Finishing

Colour	Item number.
	Satin chrome K 2460 CS
	Satin nickel K 2460 NS
	Polished gold K 2460 OL
	Bronze K 2460 BR
	White K 2460 BI
	Black K 2460 NO

For other colours please ask Krona Koblenz for feasibility

Index

Vademecum

Legenda

Performance Series

Evolution Series

Classic Series

Finishes

Accessories

Warnings




Load capacity table (see the reading guide at page 12)


Hinge spacing (mm)**	K2460 - 60 Kg - N.2 hinges											
	2000	60	60	60	60	60	60	60	60	60	58	56
	1950	60	60	60	60	60	60	60	60	60	59	56
	1900	60	60	60	60	60	60	60	60	60	57	55
	1850	60	60	60	60	60	60	60	60	58	56	53
	1800	60	60	60	60	60	60	60	59	56	54	52
	1750	60	60	60	60	60	60	60	57	55	53	51
	1700	60	60	60	60	60	58	56	53	51	49	47
	1650	60	60	60	60	60	57	54	52	50	48	46
	1600	60	60	60	60	58	55	52	50	48	46	44
	1550	60	60	60	59	56	53	51	49	47	45	43
	1500	60	60	60	57	54	52	49	47	45	43	42
	1450	60	60	58	55	52	50	48	45	44	42	40
	1540	60										
	926	700	800	900	950	1000	1050	1100	1150	1200	1250	1300
Door leaf width (mm)**												

- Tested on doors: height 2100 mm - width 900 mm - opening angle 0°-90°.

**With door dimensions and max opening angle different from the tested configuration and/or with the application of other devices such as, for example, door closers/bumpers/emergency handle/dropdown seal/etc. refer to the "Installation Examples". Please note that testing for these configurations is under customer's responsibility. We specify that the combinations are the result of interpolation and not of real tests, which remain under the customer's responsibility.

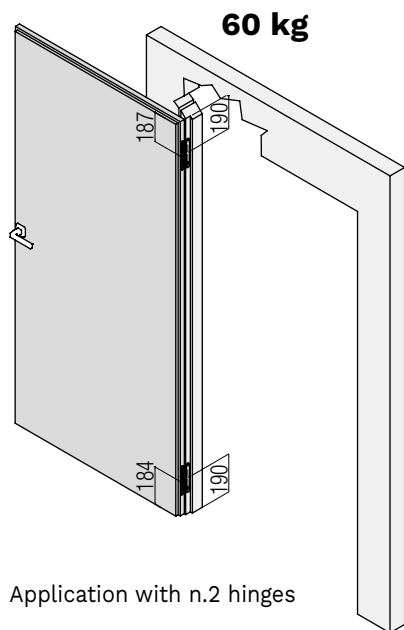Standard application

Application with n.2 hinges

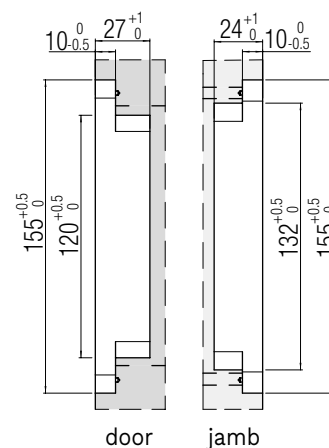Milling door/jamb**Installation of Hinge NOT centered on the door leaf**