






KUBICA K2780 HYBRID


PATENTED

<p>MATERIAL</p> <p>Casing: Steel Adjustment body: Zamak Connecting rods: Aluminum</p>	<p>LOAD CAPACITY 80 kg (n.2 hinges)</p> 	<p>APPLICATION Cladding</p> 	<p>K DISTANCE</p>  <p>K-max 9 mm</p>
<p>HINGE CENTERED ON THE DOOR LEAF</p>  <p>Max Thk 45 mm</p>	<p>OPENING ANGLE 180°</p> 	<p>3D ADJUSTMENTS</p> 	<p>INTERCHANGEABLE WITH: K2760</p> 
<p>FINISHING Full HD</p> 	<p>COVER MATERIAL Steel</p> 	<p>NUMBER OF ROTATION AXES 5</p> 	<p>COVER MATERIAL Steel</p>
<p>NUMBER OF ROTATION AXES 5</p> 	<p>Suitable for high opening and closing environment</p>	<p>Product Quality</p> <p>ift N° 21-002138-PR01 - 24/02/2022 Multi-axis, concealed hinges EAD 020001-01-0405 Reg.-N°: 9000283</p>	
<p>EN 1670</p> <p>Spray salt tested</p> <p>240 hours</p>	<p>MADE IN ITALY</p> 		

*Tested with door closer models most frequently used on the market.

Evolution Series



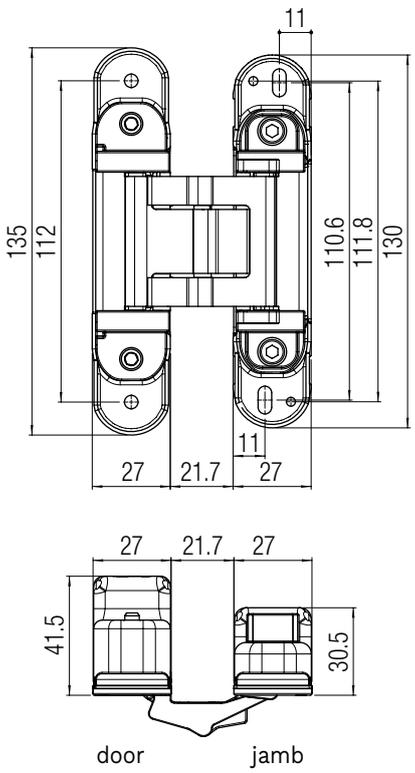

door jamb

Finishing

Colour	Item number.
	Satin chrome K 2780 CS
	Satin nickel K 2780 NS
	Polished gold K 2780 OL
	White K 2780 BI
	Black K 2780 NO

For other colours please ask Krona Koblenz for feasibility

Index

Vademecum

Legenda

Performance Series

Evolution Series

Classic Series

Finishes

Accessories

Warnings






Product details:




Load capacity table (see the reading guide at page 12)

K2780 - 80 Kg - N.2 hinges												
2000	80	80	80	80	80	80	80	80	80	77	74	
1950	80	80	80	80	80	80	80	80	80	78	75	
1900	80	80	80	80	80	80	80	80	79	76	73	
1850	80	80	80	80	80	80	80	80	77	74	71	
1800	80	80	80	80	80	80	79	75	72	69	67	
1750	80	80	80	80	80	80	77	73	70	67	65	
1700	80	80	80	80	80	78	74	71	68	65	63	
1650	80	80	80	80	79	76	72	69	66	63	61	
1600	80	80	80	80	77	73	70	67	64	62	59	
1550	80	80	80	78	75	71	68	65	62	60	57	
1500	80	80	80	76	72	69	66	63	60	58	56	
1450	80	80	78	73	70	66	63	61	58	56	54	
1540	80											
	926	700	800	900	950	1000	1050	1100	1150	1200	1250	1300
		Door leaf width (mm)**										


- Tested on doors: height 2100 mm - width 900 mm - opening angle 0°-90°.
 **With door dimensions and max opening angle different from the tested configuration and/or with the application of other devices such as, for example, door closers/bumpers/emergency handle/dropdown seal/etc. refer to the "Installation Examples". Please note that testing for these configurations is under customer's responsibility. We specify that the combinations are the result of interpolation and not of real tests, which remain under the customer's responsibility.

Standard application

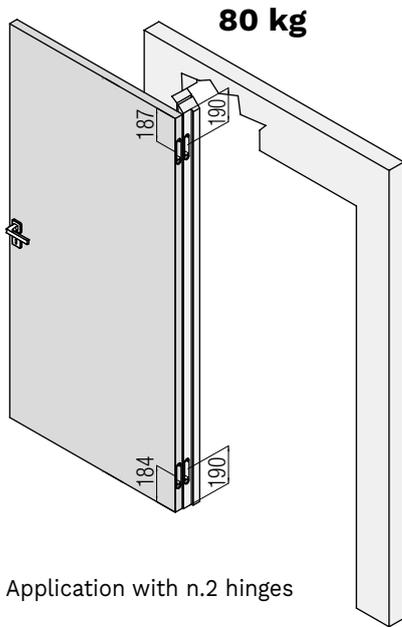


Application with n.2 hinges


Milling door/jamb

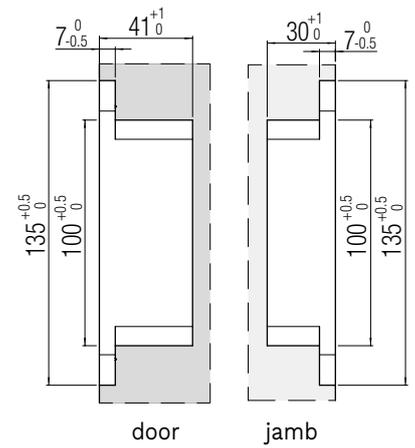

Installation of Hinge centered on the door leaf

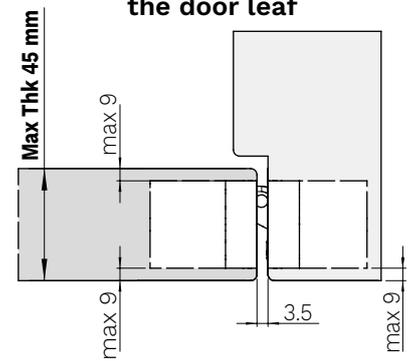

Installation of Hinge NOT centered on the door leaf

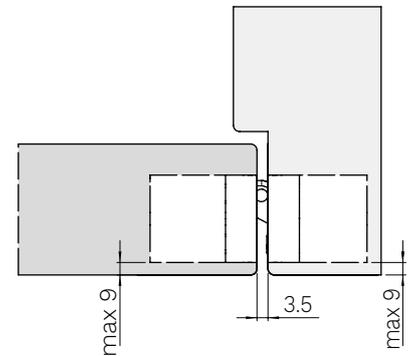

Fixing screws included
 The hinge fixing is ensured by using the **fixing screws** indicated in the hinge assembly instructions.