

FR 206

| | |
|--------------------|--------------------------------|
| SLIDE TYPE: | Regular-Extension Drawer Slide |
| MOUNTING: | Bottom Mount |

| | |
|-----------------------|----------------------|
| WIDTH: | 16 mm |
| LOAD CAPACITY: | dynamic up to 100 kg |




| | |
|------------------|--|
| MATERIAL: | steel, galvanized or white powder coated |
|------------------|--|

| | |
|------------------|--|
| FEATURES: | steel ball bearings or solid delrin* rollers |
|------------------|--|

| |
|---|
| SPECIFICATIONS: |
| <ul style="list-style-type: none"> ▶ stay-closed feature holds the drawer in place when closed ▶ dual detent in the drawer profile holds the drawer in place when extended ▶ with holes for 4,5 mm screws ▶ steel rear backstop |
| <ul style="list-style-type: none"> ① galvanized - steel ball bearings white powder coated - solid delrin* rollers |

*DüPont (TM) Delrin®

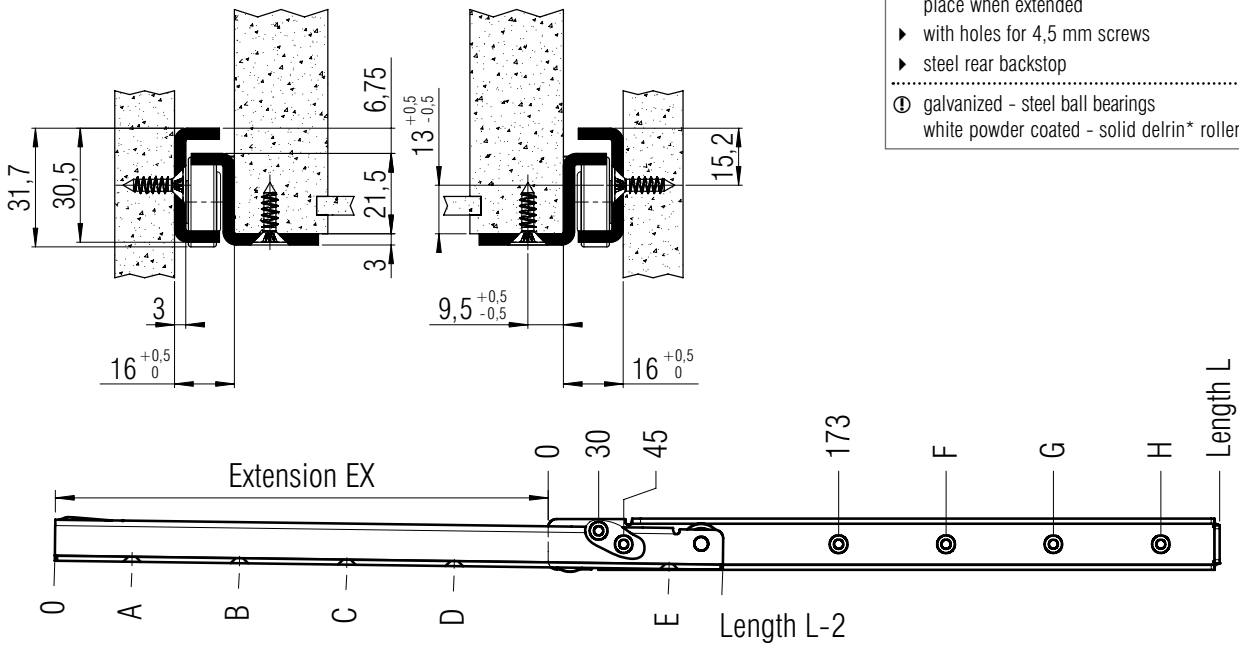

screw holes for 4,5 mm spax screws

| L mm | EX mm | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | Weight per pair (kg) | Order No. galvanized | Order No. white |
|------|-------|------|------|------|------|------|------|------|------|----------------------|----------------------|-----------------|
| 300 | 209 | 42 | 138 | 266 | | | 269 | | | 1,48 | ▶ 4064 | * |
| 350 | 259 | 60 | 188 | 316 | | | 301 | | | 1,71 | ▶ 4065 | * |
| 400 | 294 | 46 | 238 | 366 | | | 333 | | | 1,94 | ▶ 4066 | ▶ 4080 |
| 450 | 344 | 96 | 288 | 416 | | | 365 | | | 2,17 | ▶ 4067 | ▶ 4081 |
| 500 | 394 | 50 | 146 | 338 | 466 | | 365 | 461 | | 2,40 | ▶ 4068 | ▶ 4082 |
| 550 | 444 | 68 | 196 | 388 | 516 | | 365 | 493 | | 2,63 | ▶ 4069 | ▶ 4083 |
| 600 | 494 | 54 | 246 | 438 | 566 | | 365 | 557 | | 2,86 | ▶ 4070 | ▶ 4084 |
| 650 | 544 | 40 | 296 | 488 | 616 | | 365 | 621 | | 3,09 | ▶ 4071 | ▶ 4085 |
| 700 | 564 | 58 | 186 | 346 | 538 | 666 | 365 | 525 | 653 | 3,33 | ▶ 4072 | ▶ 4086 |
| 750 | 614 | 76 | 204 | 396 | 588 | 716 | 365 | 557 | 685 | 3,55 | ▶ 4073 | * |
| 800 | 654 | 62 | 190 | 446 | 638 | 766 | 365 | 621 | 749 | 3,79 | ▶ 4074 | ▶ 4087 |
| 850 | 704 | 80 | 240 | 496 | 688 | 816 | 365 | 621 | 781 | 4,04 | ▶ 4075 | * |
| 900 | 744 | 66 | 290 | 546 | 738 | 866 | 365 | 621 | 845 | 4,27 | ▶ 4076 | ▶ 4088 |
| 950 | 794 | 52 | 340 | 596 | 788 | 916 | 365 | 621 | 909 | 4,51 | ▶ 4077 | * |
| 1000 | 834 | 70 | 390 | 646 | 838 | 966 | 365 | 621 | 941 | 4,74 | ▶ 4078 | ▶ 4089 |

Packing Unit: 300-550 mm 10 sets per box; 600-1000 mm: 7 sets per box

▶ prompt delivery * on request